

FISSURED Panels/  
DOWN DX/DXL Suspension System

**LEED Credits**  
Recycled Content: 25% – 50%

MR				EQ		
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

**Features and Benefits**


- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional FIRECODE™ formulation designed to meet life safety codes.

**Applications**

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

**Substrate**

- Water-felted mineral fiber

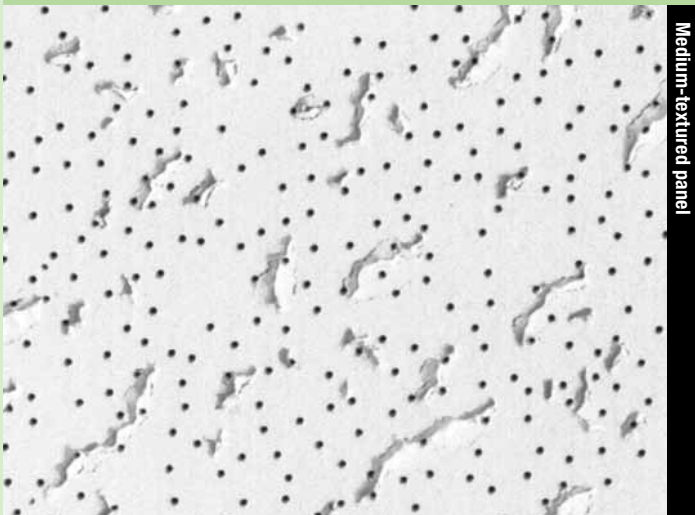

Medium-textured panel



White

UL Classified												
Edge	Panel Size	Class <sup>3</sup>	Item No.	NRC	CAC Min.	LR <sup>4</sup>	Colour	Grid Options	VOC Emissions	Recycled Content <sup>5</sup>	Panel Cost	
FISSURED Panels	SQ 	2'x2'x5/8"	Class A	560	.55	33	.81	White	A, B, C, E	Low	25%	\$
		2'x2'x5/8"		585	.55	35	.81	White	A	Low	48-50%	\$
		2'x4'x5/8"	Class A	562	.55	35	.81	White	A, B	Low	25%	\$
		2'x4'x5/8"		586	.55	35	.81	White	A	Low	48-50%	\$
	SLT 	2'x2'x5/8"	Class A	506	.55	33	.81	White	D	Low	25%	\$
		2'x4'x5/8"	Class A	507	.55	35	.81	White	D	Low	25%	\$
<b>Legend</b> <b>Low Emissions (VOC Class)</b> Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.												
Grid Profile Options	<b>A</b> DX®/DXL™	<b>B</b> DXW™	<b>C</b> CENTRICITEE™ DXT	<b>D</b> DX/DXL	<b>E</b> MERIDIAN™ DXM							

**Physical Data/  
Footnotes**

**Product literature**  
 Data sheet# EAC\_A351  
**ASTM E1264 classification**  
 Type III, Form 2, Pattern CD  
**ASTM E84 and CAN/ULC S102 surface burning characteristics**  
 Class A  
 Flame spread: 25  
 Smoke developed: 50  
**Weight**  
 .61-1.2 lb./sq. ft. (Class A)  
 1.14-1.22 lb./sq. ft. (FIRECODE)

**Thermal resistance**  
 R-1.4 (Class A)  
 R-1.6 (FIRECODE)  
**Maximum backloading**  
 See Warranty for details.  
**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Footnotes**  
 1. Applies when CGC acoustical ceilings recycling program is utilized.  
 2. Dependent on location; see Sustainability selector.  
 3. Fire-rated items: see UL design details.  
 4. LR values are shown as averages.  
 5. For details, see Sustainability selector.