



TOUCHSTONE Panels with *CLIMAPLUS* Superior Performance/
DONN DX/DXL Suspension System

LEED Credits

Recycled Content: 48%
CLIMAPLUS Superior Performance for Mould/Mildew

MR				EQ		
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits


- Panels are scuff- and abuse-resistant and can withstand day-to-day activity in high traffic areas.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.
- *FIRECODE*™ formulation designed to meet life safety codes.

Applications

- Schools
- General offices
- Retail stores

Substrate

- Water-felted mineral fiber

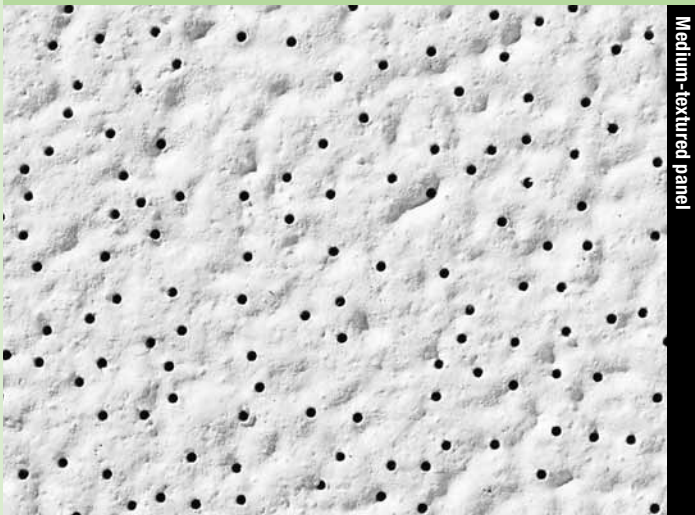

Medium-textured panel



White

Web Sites:
www.cgcinc.com
www.usgdesignstudio.com
www.sustainableceilings.com
www.seismicceilings.com

Customer Service
 Ontario/Atlantic Canada 800-387-2690
 Quebec/Eastern Ontario 800-361-1310
 Western Canada 800-242-4418

30
 Year System Warranty
 – No visible sag
 – Mould/mildew protection

UL Classified													
Edge	Panel Size	Class ³	Item No.	NRC	CAC Min.	LR ⁴	Colour	Grid Options	VOC Emissions	Anti-Mould & Mildew	Abuse-Resistant	Recycled Content ⁵	Panel Cost
TOUCHSTONE CLIMAPLUS Panels	SQ 		5893	.55	35	.86	White	A, B, C	Low			48%	\$\$
			5894	.55	35	.86	White	A, B	Low			48%	\$\$
	SLT 		5896	.55	35	.86	White	D	Low			48%	\$\$
	FLB 		5899	.55	35	.86	White	E, F, G, H, I, J	Low			48%	\$\$

Legend

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

CLIMAPLUS Superior Performance⁶

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mould/mildew.

Grid Profile Options

A DX [®] /DXL™	B DXW™	C CENTRICITEE™ DXT	D DX/DXL	E CENTRICITEE [®] DXT	F CENTRICITEE™ DXLT	G FINELINE [®] DXF	H FINELINE [®] 1/8 DXFF	I FINELINE [®] DXLF	J IDENTITEE™ DXI

Physical Data/ Footnotes

Product literature
 Data sheet# EAC_A375

ASTM E1264 classification

Type III, Form 2, Pattern CEI

ASTM E84 and CAN/ULC S102 surface burning characteristics

Class A
 Flame spread: 25
 Smoke developed: 50

Weight
 1.0-1.3 lb./sq. ft.

Thermal resistance

R-1.6

Maximum backloading

See Warranty for details.

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Footnotes

1. Applies when CGC acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Fire-rated items: see UL design details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.
6. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard

formulation that inhibits and retards the growth of mould/mildew.