



TOUCHSTONE Panels with *CLIMAPLUS* Superior Performance/  
DONN DX/DXL Suspension System

**LEED Credits**

Recycled Content: 48%  
*CLIMAPLUS* Superior Performance for Mould/Mildew

MR				EQ		
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

**Features and Benefits**


- Panels are scuff- and abuse-resistant and can withstand day-to-day activity in high traffic areas.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.
- *FIRECODE*™ formulation designed to meet life safety codes.

**Applications**

- Schools
- General offices
- Retail stores

**Substrate**

- Water-felted mineral fiber

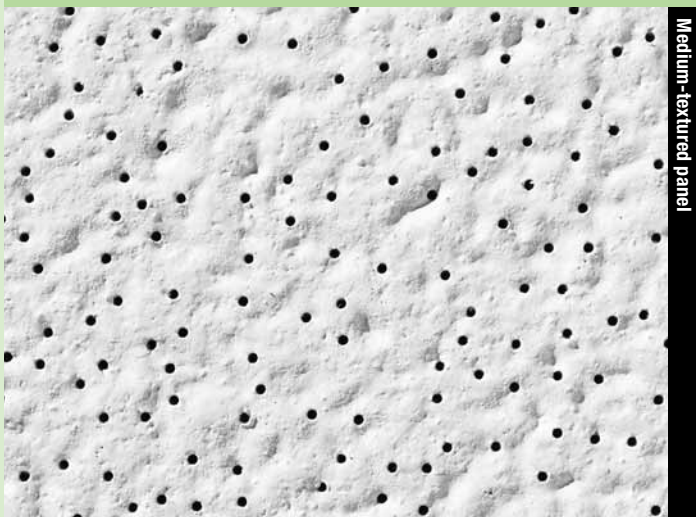

Medium-textured panel



White

Web Sites:  
[www.cgcinc.com](http://www.cgcinc.com)  
[www.usgdesignstudio.com](http://www.usgdesignstudio.com)  
[www.sustainableceilings.com](http://www.sustainableceilings.com)  
[www.seismicceilings.com](http://www.seismicceilings.com)

Customer Service  
 Ontario/Atlantic Canada 800-387-2690  
 Quebec/Eastern Ontario 800-361-1310  
 Western Canada 800-242-4418

**30**  
 Year System Warranty  
 – No visible sag  
 – Mould/mildew protection

	Edge	Panel Size	Class <sup>3</sup>	UL Classified			Colour	Grid Options	VOC Emissions	Anti-Mould & Mildew	Abuse-Resistant	Recycled Content <sup>5</sup>	Panel Cost	
				Item No.	NRC	CAC Min.								LR <sup>4</sup>
TOUCHSTONE CLIMAPLUS Panels	SQ 	2' x 2' x 5/8"		5893	.55	35	.86	White	A, B, C	Low			48%	\$\$
		2' x 4' x 5/8"		5894	.55	35	.86	White	A, B	Low			48%	\$\$
	SLT 	2' x 2' x 5/8"		5896	.55	35	.86	White	D	Low			48%	\$\$
	FLB 	2' x 2' x 5/8"		5899	.55	35	.86	White	E, F, G, H, I, J	Low			48%	\$\$

**Legend**

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

CLIMAPLUS Superior Performance<sup>6</sup>

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mould/mildew.

**Grid Profile Options**

A	B	C	D	E	F	G	H	I	J
DX <sup>®</sup> /DXL <sup>™</sup>	DXW <sup>™</sup>	CENTRICITEE <sup>™</sup> DXT	DX/DXL	CENTRICITEE <sup>®</sup> DXT	CENTRICITEE DXLT	FINELINE <sup>®</sup> DXF	FINELINE <sup>®</sup> 1/8 DXFF	FINELINE <sup>®</sup> DXLF	IDENTITEE <sup>™</sup> DXI

**Physical Data/ Footnotes**

**Product literature**  
 Data sheet# EAC\_A375

**ASTM E1264 classification**

Type III, Form 2, Pattern CEI

**ASTM E84 and CAN/ULC S102 surface burning characteristics**

Class A  
 Flame spread: 25  
 Smoke developed: 50

**Weight**  
 1.0-1.3 lb./sq. ft.

**Thermal resistance**

R-1.6

**Maximum backloading**

See Warranty for details.

**Maintenance**

Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Applies when CGC acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Fire-rated items: see UL design details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.
6. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard

formulation that inhibits and retards the growth of mould/mildew.