


TREBOR BUILDING PRODUCTS LTD.

1499-B Star Top Road, Gloucester, Ontario K1B 3W5
TEL.: (613) 749-6600 FAX: (613) 749-2790

TECHNICAL DATA SHEET

DEFLECTION TRACK

Our deflection tracks meet Canadian steel standards established by CSSBI (Canadian Institute of Sheet Steel Building).

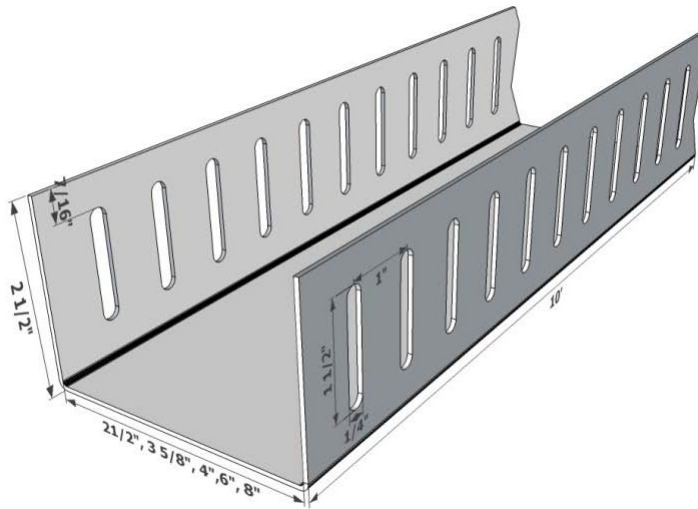

WIDTH	HEIGHT	THICKNESS
2 1/2" (64mm)	2 1/2" (64mm)	.018" (.46mm) .034" (.86mm) .045" (1.14mm) .056" (1.42mm)
3 5/8" (92mm)	2 1/2" (64mm)	
4" (102mm)	2 1/2" (64mm)	
6" (152mm)	2 1/2" (64mm)	
8" (203mm)	2 1/2" (64mm)	

Our deflection tracks are used to allow a +/- 3/4" height deflection of a wall. They are used for interior applications.

Galvanizing used for the components is described in the CSSBI Technical Bulletin of February 2006, G60 (Z-180) for all thicknesses.

